

RF Test Antennas

VIAVI

VIAVI Solutions



Table of Contents

Selection Table	3
------------------------------	----------

Omni Antenna

G700050353, G700050354, G700050355, G700050356, G700050357, G700050350	4
---	----------

Dual Band Omni Antenna

G700050359	8
------------------	---

Mag Mount Omni Antenna

G700050358	10
G700050340	11
G700050342	12

Yagi Antenna

G700050363	14
G700050365	15

Broadband Log Periodic Antenna

G700050366, G700050367	16
------------------------------	----

Horn Antenna

G700050370	17
------------------	----

Isotropic Antenna

G700050380	18
------------------	----

GPS Antenna

JD71050351	19
G700050390	20
JD72050005	21

Selection Table

Antenna Type	Catalog Number	Connector	Frequency Range
Omni Antenna	G700050353	N plug (male)	806 to 896 MHz
	G700050354	N plug (male)	870 to 960 MHz
	G700050355	N plug (male)	1710 to 2170 MHz
	G700050356	N plug (male)	720 to 800 MHz
	G700050357	N plug (male)	2300 to 2700 MHz
	G700050350	N plug (male)	3300 to 3800 MHz
Dual Band Omni Antenna	G700050359	N plug (male)	2400 to 2500 MHz
			5100 to 5900 MHz
Mag Mount Omni Antenna	G700050358	N plug (male)	689 to 6000 MHz
	G700050340	K jack (female)	26500 to 40000 MHz
	G700050342	K jack (female)	26500 to 40000 MHz
Yagi Antenna	G700050363	N jack (female)	1750 to 2390 MHz
	G700050365*	N jack (female)	866 to 960 MHz
Log Periodic Antenna	G700050366	SMA jack (female)	650 to 4000 MHz
	G700050367	SMA jack (female)	650 to 6000 MHz
Horn Antenna	G700050370	K jack (female)	26500 to 40000 MHz
Isotropic Antenna	G700050380	N plug (male)	26 to 3000 MHz
GPS Antenna	JD71050351	SMA plug (male)	L1 1575.42 MHz
	G700050390	SMA plug (male)	L1 1575.42 MHz
	JD72050005**	USB Type A	L1 1575.42 MHz


* Not available for EU countries

** For JD720C series only

Omni Antenna


Specifications

VIAVI Omni antennas are used for both indoor and outdoor applications. They are constructed with a Type N male connector to make it easy for a direct attachment.

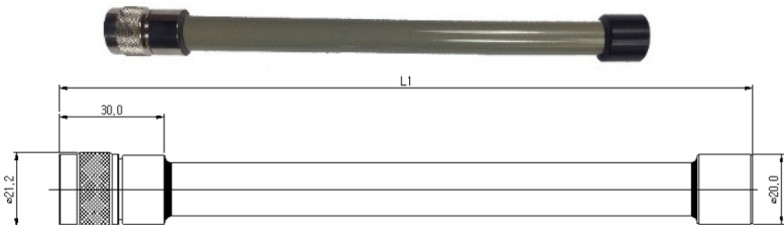
Catalog Number	G700050353	G700050354	G700050355	G700050356	G700050357
Mechanical Data					
Length (L1)					
	227.0 ± 3.0 mm	223.0 ± 3.0 mm	143.0 ± 3.0 mm	266.0 ± 3.0 mm	129.0 ± 3.0 mm
Connector	Type N plug (male)				
Environmental Data					
Operating Temperature	-20 to +70°C	-20 to +70°C	-20 to +70°C	-20 to +70°C	-20 to +70°C
Electrical Data					
Frequency Range	806 to 896 MHz	870 to 960 MHz	1710 to 2170 MHz	720 to 800 MHz	2300 to 2700 MHz
Gain	> 1 dBi	> 1 dBi	> 1 dBi	> 1 dBi	> 1 dBi
VSWR	≤ 2.4:1 (806 to 816 MHz)	≤ 2.0:1	≤ 2.0:1	≤ 2.0:1 (720 to 780 MHz)	≤ 2.0:1
	≤ 2.0:1 (816 to 896 MHz)			≤ 2.4:1 (780 to 800 MHz)	
Impedance	50 Ω	50 Ω	50 Ω	50 Ω	50 Ω
Maximum Power	50 W	50 W	50 W	50 W	50 W

Antenna Pattern


G700050353 (806 to 896 MHz)

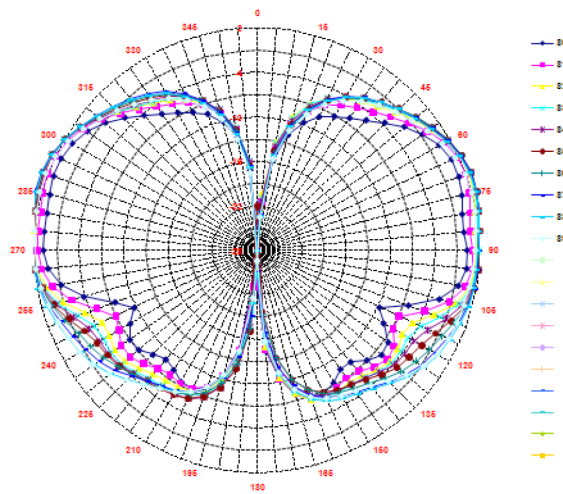


G700050354 (870 to 960 MHz)

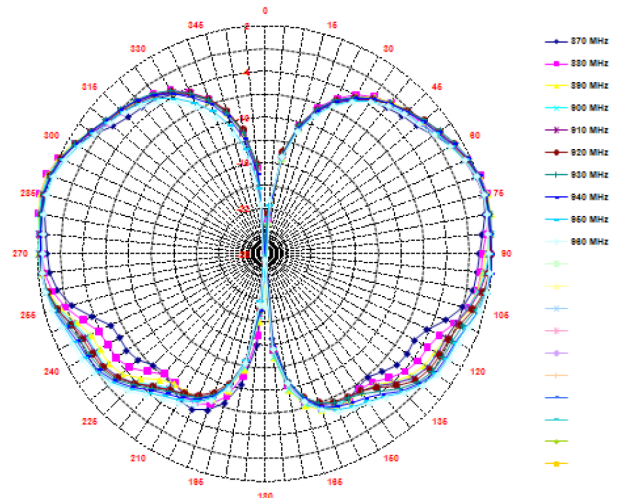


G700050355 (1710 to 2170 MHz)

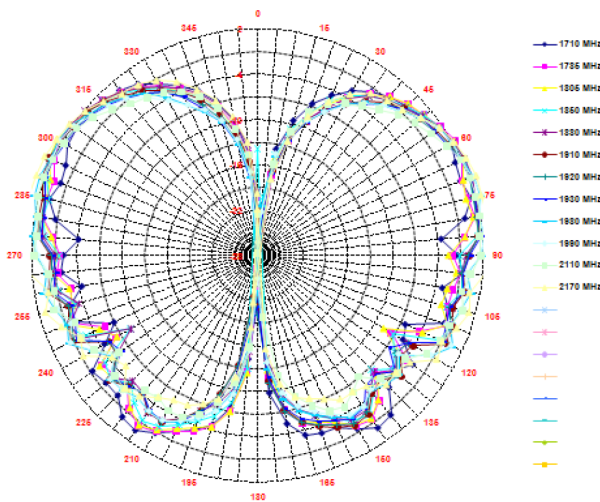

G700050356 (720 to 800 MHz)

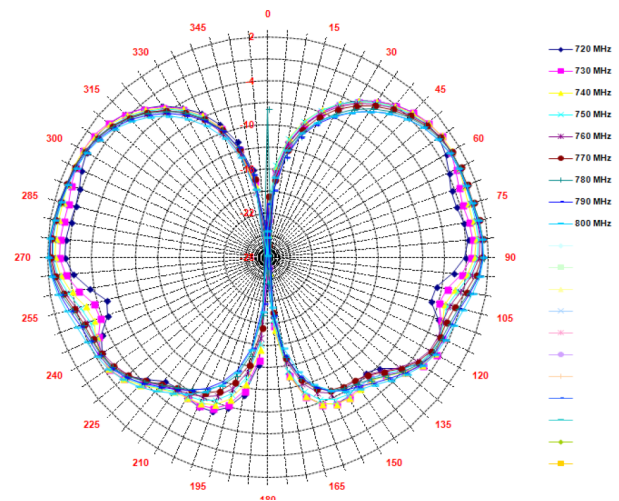

G700050357 (2300 to 2700 MHz)

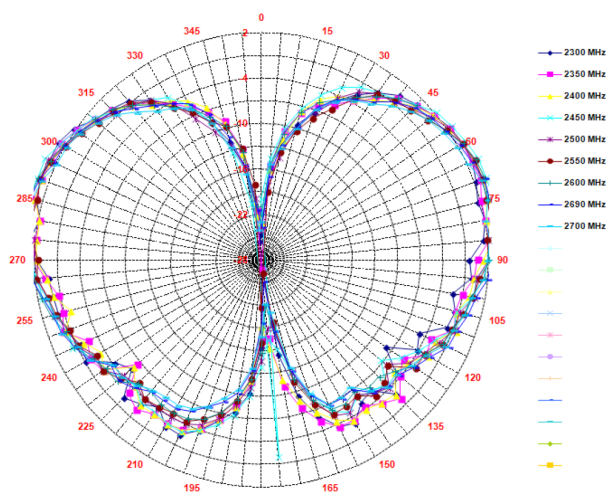

Specifications

Catalog Number	G700050350
----------------	------------

RF omni antenna, N(m), 3.3 to 3.8 GHz, 4 dBi

Mechanical Data

Dimension	280 x 24 mm (11.02 x 0.94 in) 
Connector	Type N plug (male)


Electrical Data

Frequency Range	3300 to 3800 MHz
Gain	> 4 dBi
VSWR	≤ 2.0:1
Impedance	50 Ω


Antenna Pattern

3300 MHz

E-plane

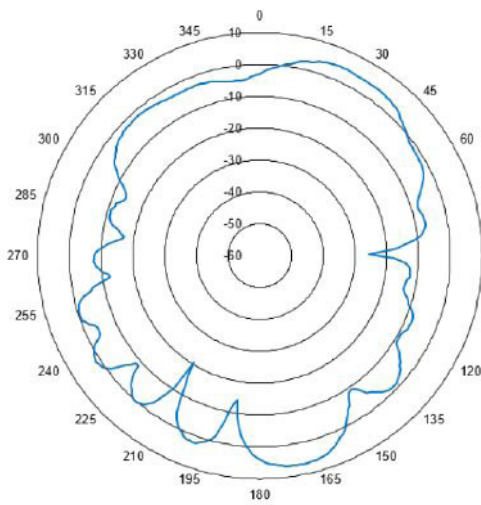


H-plane

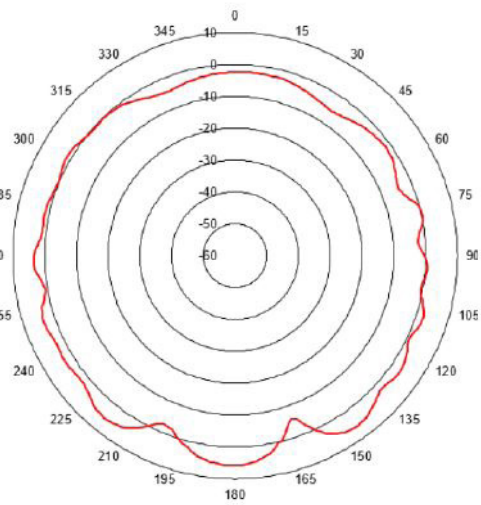


3550 MHz

E-plane

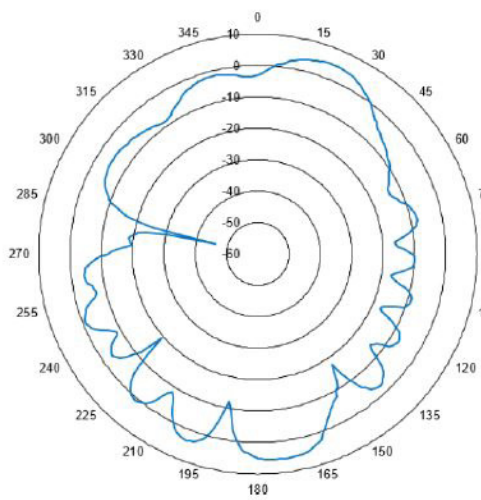


H-plane

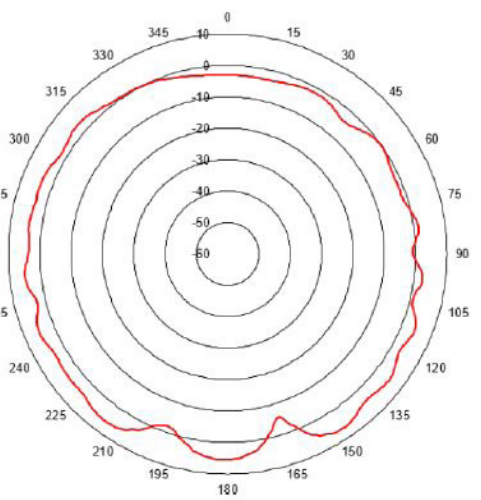


3800 MHz

E-plane

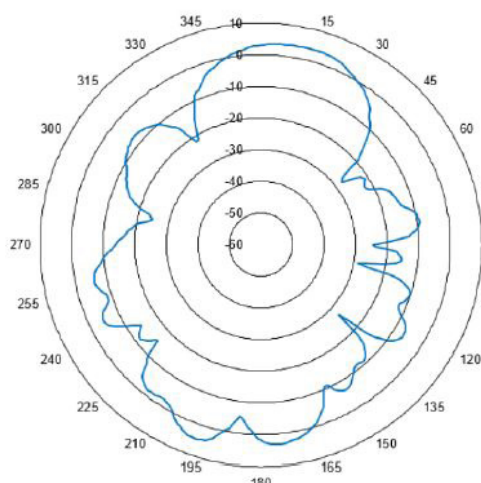

H-plane

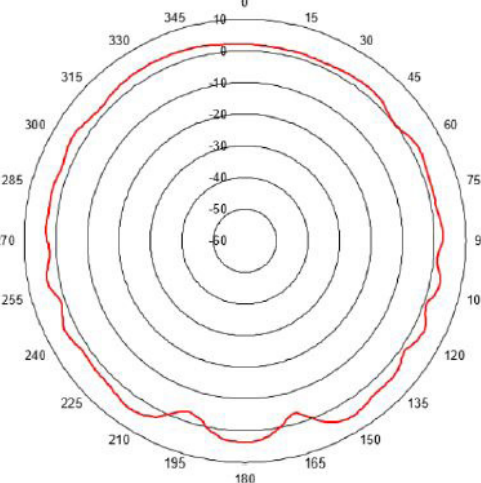

Dual Band Omni Antenna

Specifications

Catalog Number	G700050359
----------------	------------

RF omni antenna, N(m), 2.4 to 2.5 GHz, 4.5 dBi, and 5.15 to 5.85 GHz, 7 dBi

Mechanical Data

Dimension	180 x 23 mm (7.07 x 0.89 in) 
-----------	---

Radome Material	ABS
-----------------	-----


Connector	Type N plug (male)
-----------	--------------------

Electrical Data


Frequency Range	2400 to 2500 MHz
	5150 to 5850 MHz
Gain	4.5 dBi (2400 to 2500 MHz)
	7 dBi (5150 to 5850 MHz)
VSWR	≤ 2.0:1
Impedance	50 Ω
Electrical Wave	1/4

Antenna Pattern

2.4 GHz

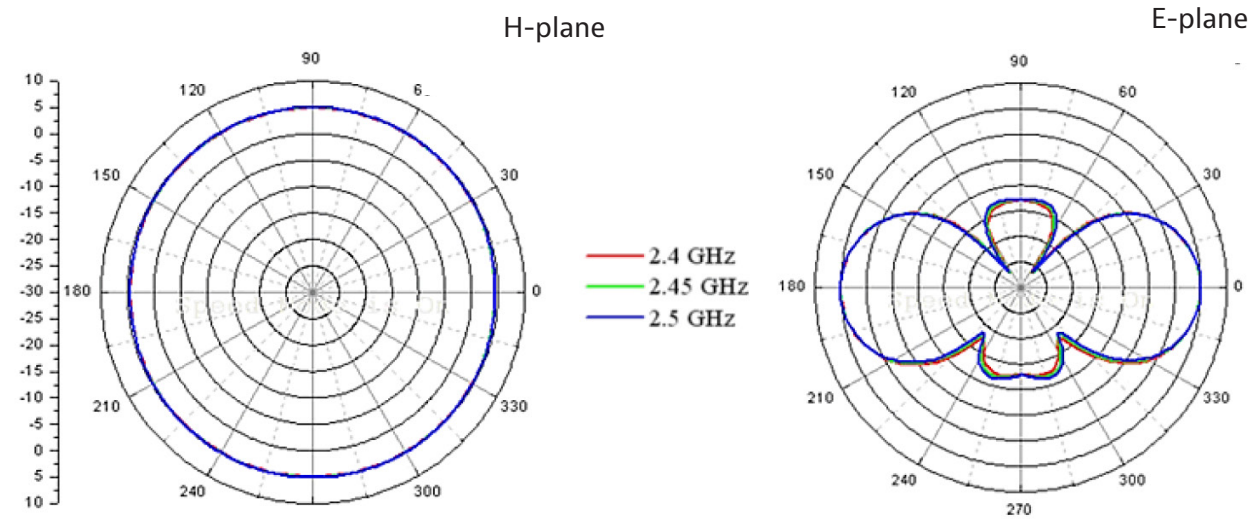

5.8 GHz

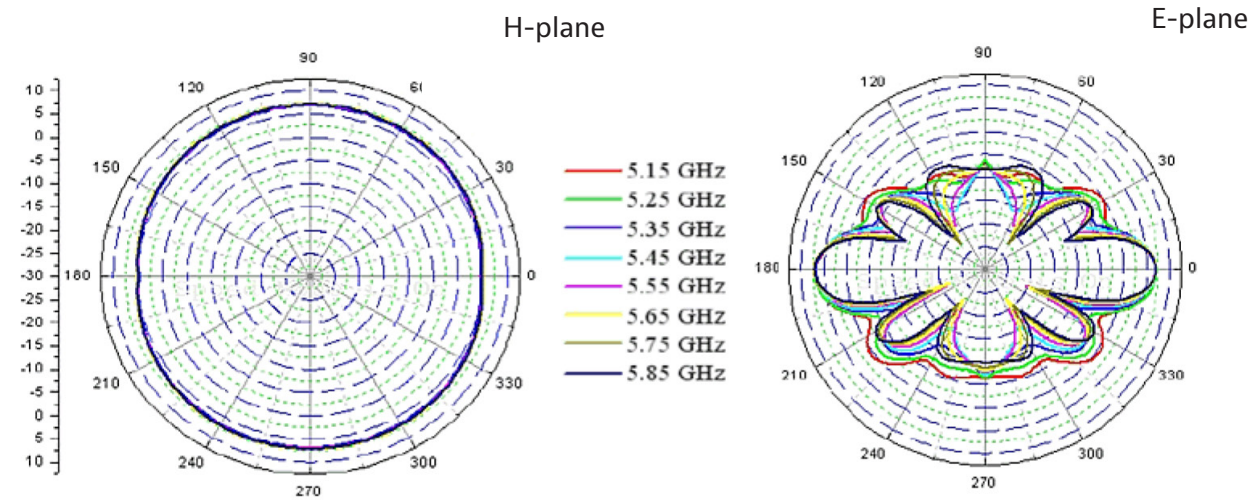

Mag Mount Omni Antenna

Specifications

Catalog Number	G700050358
----------------	------------

Mag mount RF omni antenna, N(m), 694 to 6000 MHz

Mechanical Data

Dimension	107 x 107 x 93 mm (4.20 x 4.20 x 3.67 in)	
Radome Material	Black ASA UV Inhibitive	
Cable	RG-174, 8 ft. (GPS DC 3V and 5V)	
	RF-195, 8 ft. (694-960/1710-3700 MHz) RF-195, 8 ft. (2.4 to 2.485 and 4.9 to 6.0 GHz)	
Connector	RF: Type N plug (male)	
	GPS: SMA plug (male)	

Environmental Data

Operating Temperature	-40 to +80°C
Shock and Vibration	IEEE1478, EN 61373, MIL-810G, TIA 329.2-C
Dust and Water Ingress	IP67

Electrical Data

Frequency Range	RF: 694-960 MHz, 1710-3700 MHz, 2400 MHz, and 4900-6000 MHz
	GPS: 1575.42 ± 2 MHz
Gain	3 dBi (694 to 960 MHz)
	4 dBi (1710 to 3700 MHz)
	5 dBi (2.4 to 2.485 and 4.9 to 6.0 GHz)
GPS Unit Gain	26 dB, 5 dBi antenna
	3.3 and 5 V DC (Voltage)
	10 mA typical, 20 mA max. (Current)
VSWR	< 2.0:1
Impedance	50 Ω nominal
Maximum Power	10 W

Catalog Number	G700050340
----------------	------------

Mag mount RF omni antenna, K(f), 26.5 to 40 GHz, 3 dBi

Mechanical Data	
Dimension	52 x 52 x 84.3 mm (2.05 x 2.05 x 3.32 in) 
Weight	200 g (7.05 oz)
Radome Material	HDPE
Connector	K jack (female)
Environmental Data	
Operating Temperature	-40 to +85°C
Electrical Data	
Frequency Range	26500 to 40000 MHz
Gain	3 dBi typical*
Azimuth Gain Variation	± 1 dB
Azimuth Beam Width	360°
3 dB Vertical Beam Width	45°
Return Loss	8 dB
Maximum Power	200 W


* Catalog number G700050343 available for factory upgrade with LNA

Specifications

Catalog Number	G700050342
----------------	------------

Mag mount RF omni antenna with LNA, K(f), 26.5 to 40 GHz, 18 dBi


Mechanical Data

Dimension	54.20 x 80.0 x 125.5 mm (2.13 x 3.15 x 4.94 in)	
Weight	340 g (11.99 oz)	
Radome Material	HDPE	
Connector 1	K jack (female)	
Connector 2	USB Type C with locking screw	
Environmental Data		
Operating Temperature	-20 to +65°C	
Electrical Data		
Frequency Range	26500 to 40000 MHz	
Gain	18 dBi typical (3 dBi from the antenna and 15 dBi from the integrated LNA)	
Azimuth Gain Variation	± 1 dB	
Azimuth Beam Width	360°	
3 dB Vertical Beam Width	45°	
P1dB	11 dBm	
Return Loss	10 dB	
RF Input Power	-8 dBm maximum	
Damage RF Input Power	-3 dBm maximum	
Supply Voltage	4.8 V DC minimum, 5 V DC typical, 20 V DC maximum	
Supply Current	150 mA typical	


Antenna Pattern

G700050340 (28 GHz)

E-plane

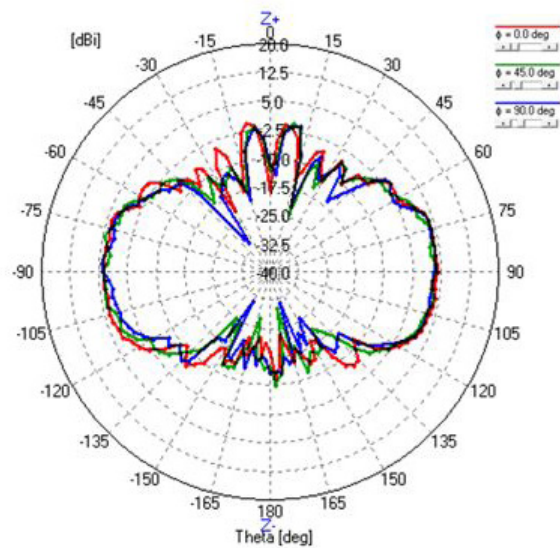


H-plane

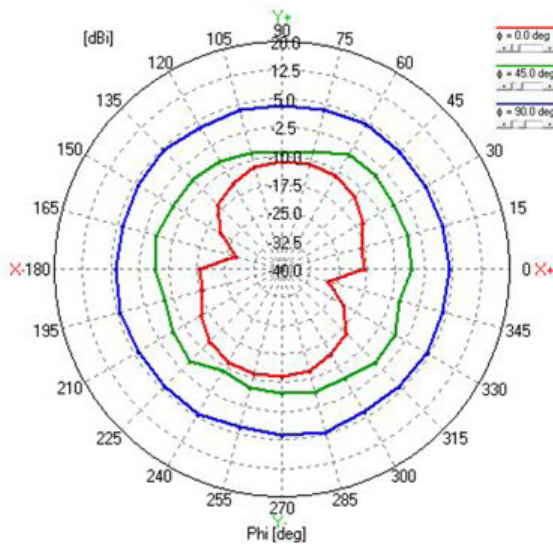


G700050342 (28 GHz)

E-plane

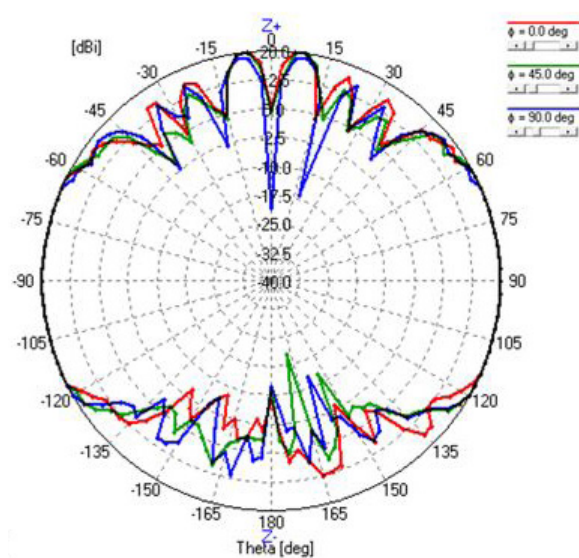

H-plane

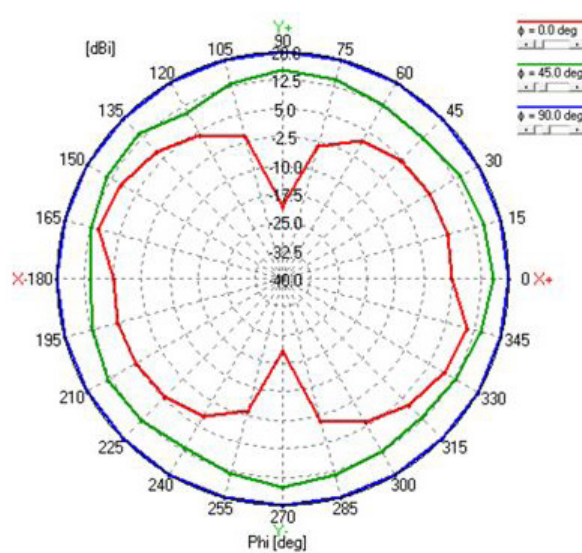

Yagi Antenna

Specifications

VIAVI directional Yagi antennas are designed to receive the signal from the Base Station with ruggedized aluminum and/or stainless-steel construction. They are ideal for outdoor applications such as Over The Air (OTA) measurement and interference analysis.

Catalog Number	G700050363
-----------------------	-------------------

RF Yagi antenna, N(f), 1750 to 2390 MHz


Mechanical Data	
Dimension	 200 x 200 x 603 mm (7.87 x 7.87 x 23.74 in)
Weight	≤ 2 kg (incl. bracket)
Radome Material	ASA
Connector	Type N jack (female)
Withstand Wind Pressure	60 m/sec
Mechanical Tilt	± 30° (Up, Down)
	± 30° (Left, Right)
Environmental Data	
Operating Temperature	-40 to +70°C
Electrical Data	
Frequency Range	1750 to 2390 MHz
Polarization	Vertical
Band Width	640 MHz
Gain	≥ 13 dBi
Beam Width	45 ± 5° (Horizontal)
	40 ± 5° (Vertical)
VSWR	< 1.4:1
Impedance	50 Ω
Maximum Power	50 W

Catalog Number	G700050365
----------------	------------

RF Yagi antenna, 866 to 960 MHz

Mechanical Data**Dimension**

Length 660 mm (25.98 in)

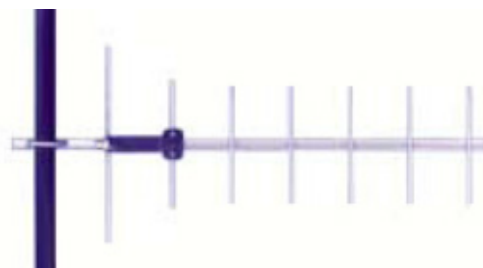**Weight**

< 907 g (2 lbs.)

Material $\frac{1}{2}$ " aluminum U channel boom $\frac{1}{4}$ " solid elements

UV inhibited polyester coat

Connector

Type N jack (female)

Withstand Wind Pressure

125 MPH

Electrical Data**Frequency Range**

866 to 960 MHz

Gain

10.2 dBi

Beam Width

55° (Horizontal)

50° (Vertical)

VSWR

< 2.0:1


Impedance50 Ω **Maximum Power**

300 W


Antenna Pattern

G700050363 (1750 to 2390 MHz)

Horizontal Pattern

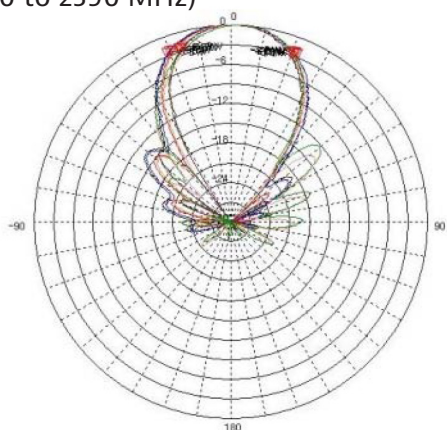


Vertical Pattern

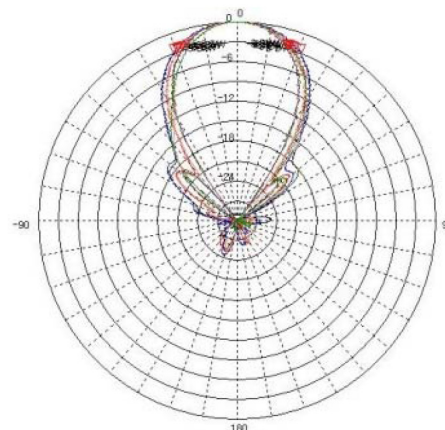


G700050365 (866 to 960 MHz)

Horizontal Pattern

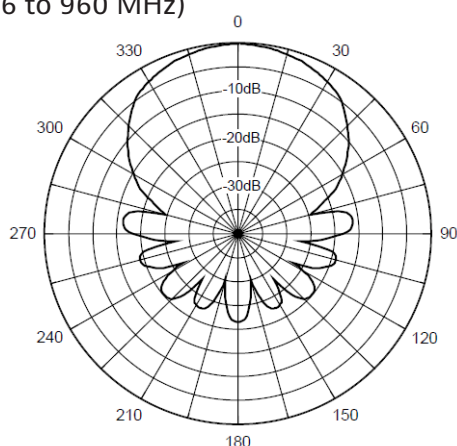

Vertical Pattern

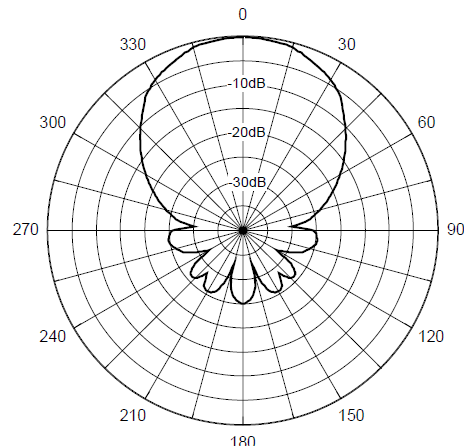

Broadband Log Periodic Antenna



Specifications

VIAVI broadband log periodic antenna is an extremely cost-effective solution that works with an AntennaAdvisor handle and CellAdvisor base station analyzer to let technicians at any skill level quickly identify and isolate RF interference. With a wide frequency coverage (up to 6 GHz), field technicians working in the cellular spectrum only need this one antenna for different cellular bands. A robust design and rugged construction with a high-tech radome housing protects against mechanical stress and environmental influence without sacrificing performance. This antenna can be used with optional JD70050007 AntennaAdvisor Handle.

Catalog Number	G700050366	G700050367
Mechanical Data		
Dimension	197 x 310 x 25.4 mm (7.75 x 12.20 x 1 in)	
Connector	SMA jack (female)	SMA jack (female)
Environmental Data		
Operating Temperature	-30 to +70°C (-22 to 158°F)	-30 to +70°C (-22 to 158°F)
Electrical Data		
Frequency Range	650 to 4000 MHz	650 to 6000 MHz
Gain	5 dBi	5 dBi
VSWR	< 2.0:1	< 2.0:1
Maximum Power	50 W	50 W

Antenna Pattern

G700050367 (650 to 6000 MHz)

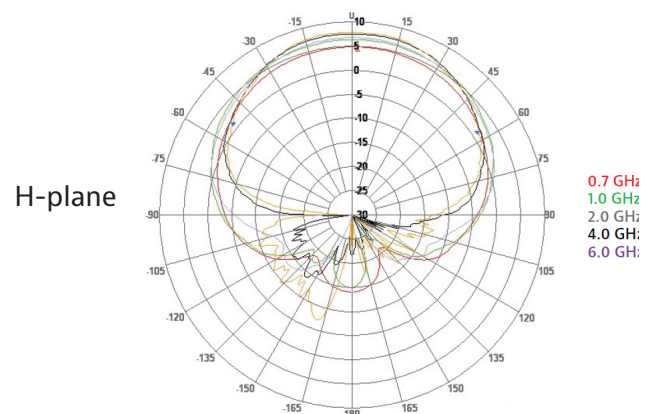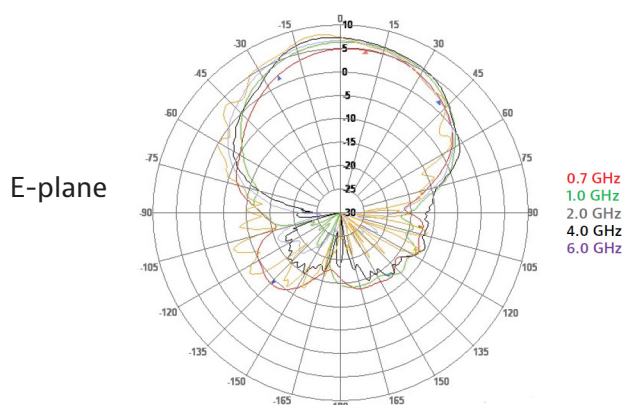

Horn Antenna

Specifications

Catalog Number	G700050370
----------------	------------

RF directional horn antenna kit that includes a 26.5 to 40 GHz horn antenna, a tripod handle, a 40 GHz cable, and a hard carrying case.

Mechanical Data

Dimension	93.73 x 36.83 x 27.94 mm (3.69 x 1.45 x 1.10 in)	
Connector	K jack (female)	

Electrical Data

Frequency Range	26.5 to 40 GHz
Polarization	Linear
Gain	20 dBi
3 dB Beam Width	16.7° (E-Plane)
	18.3° (H-Plane)
VSWR	≤ 1.25:1
Impedance	50 Ω nominal


Isotropic Antenna

Specifications

Catalog Number	G700050380
-----------------------	-------------------

Isotropic antenna, N(m), 26 MHz to 3 GHz

Mechanical Data

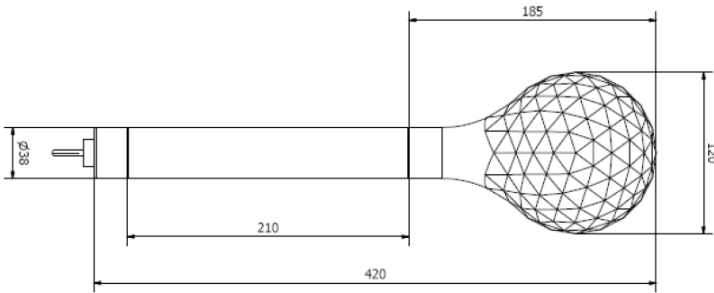Dimension	120 x 120 x 420 mm (4.7 x 4.7 x 16.5 in) 
Connector	Type N plug (male)

Environmental Data

Operating Temperature	-10 to +50°C
------------------------------	--------------

Electrical Data

Frequency Range	26 to 3000 MHz
Dynamic Range	1 mV – 300 V/m (26 to 500 MHz)
	0.2 mV/m – 200 V/m (500 to 3000 MHz)
	Up to 1000 V/m for frequencies < 110 MHz
Maximum Field Strength (destruction limit)	400 V/m (500 to 3000 MHz)
Isotropy	< ± 0.6 dB (26 to 2000 MHz) • 900 MHz: < ± 0.50 dB • 1800 MHz: < ± 0.55 dB
	< ± 1 dB (2000 to 3000 MHz)
Impedance	50 Ω
Control and Power Supply	USB

GPS Antenna

Specifications

Catalog Number	JD71050351
----------------	------------

GPS antenna with cable

Mechanical Data

Dimension	45 x 45 x 13 mm (1.77 x 1.77 x 0.51 in)	
Weight	110 g (incl. 5 m cable and connector)	
Cable Length	5 m (16.4 ft)	
Connector	SMA plug (male)	

Environmental Data

Operating Temperature	-10 to +50°C
-----------------------	--------------

Electrical Data

Patch

Center Frequency	1575.42 MHz
Bandwidth (10 dB return loss)	10 MHz min @ S11-10 dB
Return Loss	-10 dB max.
Gain at Zenith	5.0 dBi typical
Polarization	RHCP
Axial Ratio	3 dB typical

Filter/LNA

Center Frequency	1575.42 MHz $\pm$ 3
Gain	28 dB typical (without cable)
Noise Figure	1.2 dB typical
Output VSWR	< 2.0:1
Voltage	2.7 to 5 V dc
Current	8 mA typical @ 3.3 V $\pm$ 0.1 (11 mA max.)

Catalog Number	G700050390
-----------------------	-------------------

GPS SMA mount antenna

Mechanical Data**Dimension**

15.1 x 15.1 x 44.5 mm (0.59 x 0.59 x 1.75 in)

**Weight**

30 g (1.06 oz)

Radome Material

Black Ultem 1000

Connector

SMA plug (male)

Environmental Data**Operating Temperature**

-40 to +71°C

Electrical Data**Center Frequency**

1575.42 MHz

VSWR $\leq 3.0:1$ **Gain**-5 dBic $\pm$ 1 dB**Polarization**

RHCP

Beam Width

120° x 120°

Axial Ratio at Zenith

4 dB typical

Impedance50 Ω

Catalog Number	JD72050005
-----------------------	-------------------

USB GPS receiver for JD720C series

Mechanical Data

Dimension

53 x 53 x 19.2 mm (2.08 x 2.08 x 0.75 in)



Weight

62.37 g (2.2 oz)

Cable Length

1.5 m (59 in)

Connector

USB Type A

Environmental Data

Operating Temperature

-40 to +85°C

Electrical Data

Center Frequency

1575.42 MHz

Channels

48 all-in-view tracking

Sensitivity

-163 dBm

Voltage

4.5 to 5.5 V dc

Current

55 mA max.



Contact us +1 844 GO VIAVI
To find the VIAVI office nearest you, visit viavisolutions.com/contact



© 2019 VIAVI Solutions Inc.
Product specifications and descriptions
in this document are subject to change
without notice.

viavisolutions.com